ENGMAR | Innovative extraction solutions for the protection of welders

CERAMAR

Ceramic protective spray

MADE IN FRANCE

LIFESPAN INCREASE OF CONSUMABLES

PREVENT WELD SPATTERS

PRODUCTS BENEFIT

- **The best thermal protection** currently available on the market: **up to 1600°C.**
- **Long-term use**: a single application for 4 hours of welding at 300A at 29V (on average).
- **Reduction of short circuits** between gas nozzle and contact tip.

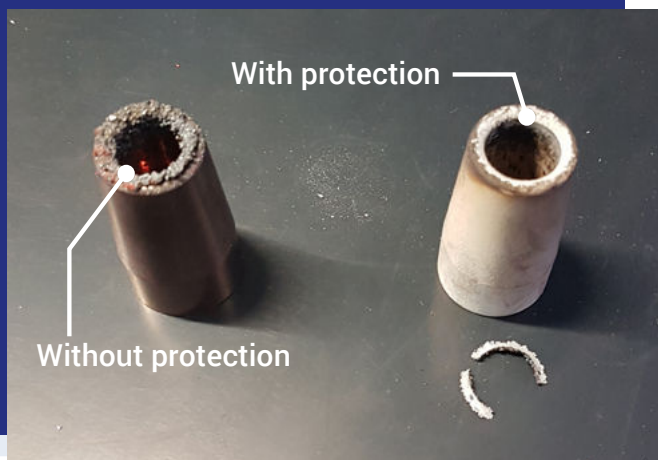

OPERATING PROCEDURE

1. Apply a thin layer of CERAMAR on your ENGMAR gas nozzles.

2. Leave to dry and do not touch for a least 5 minutes.

3. Optimum drying is achieved after 4 hours.

For an optimal result, we recommend you to treat your gaz nozzles at the end of day for the next day.

ENGMAR SAS
ZA La Poste - Impasse du Pré Rond - 69490 ST ROMAIN DE POPEY - FRANCE
+33 (0)4 74 01 10 10 - contact@engmar.fr - www.engmar.eu
SAS with a capital of 250 000€ - VAT ID number: 481 142 602 00046 - Commercial register Nantes 481 142 602 - APE code: 4669B- Tax registration number: FR15 481142602

V1-F_04-2026